


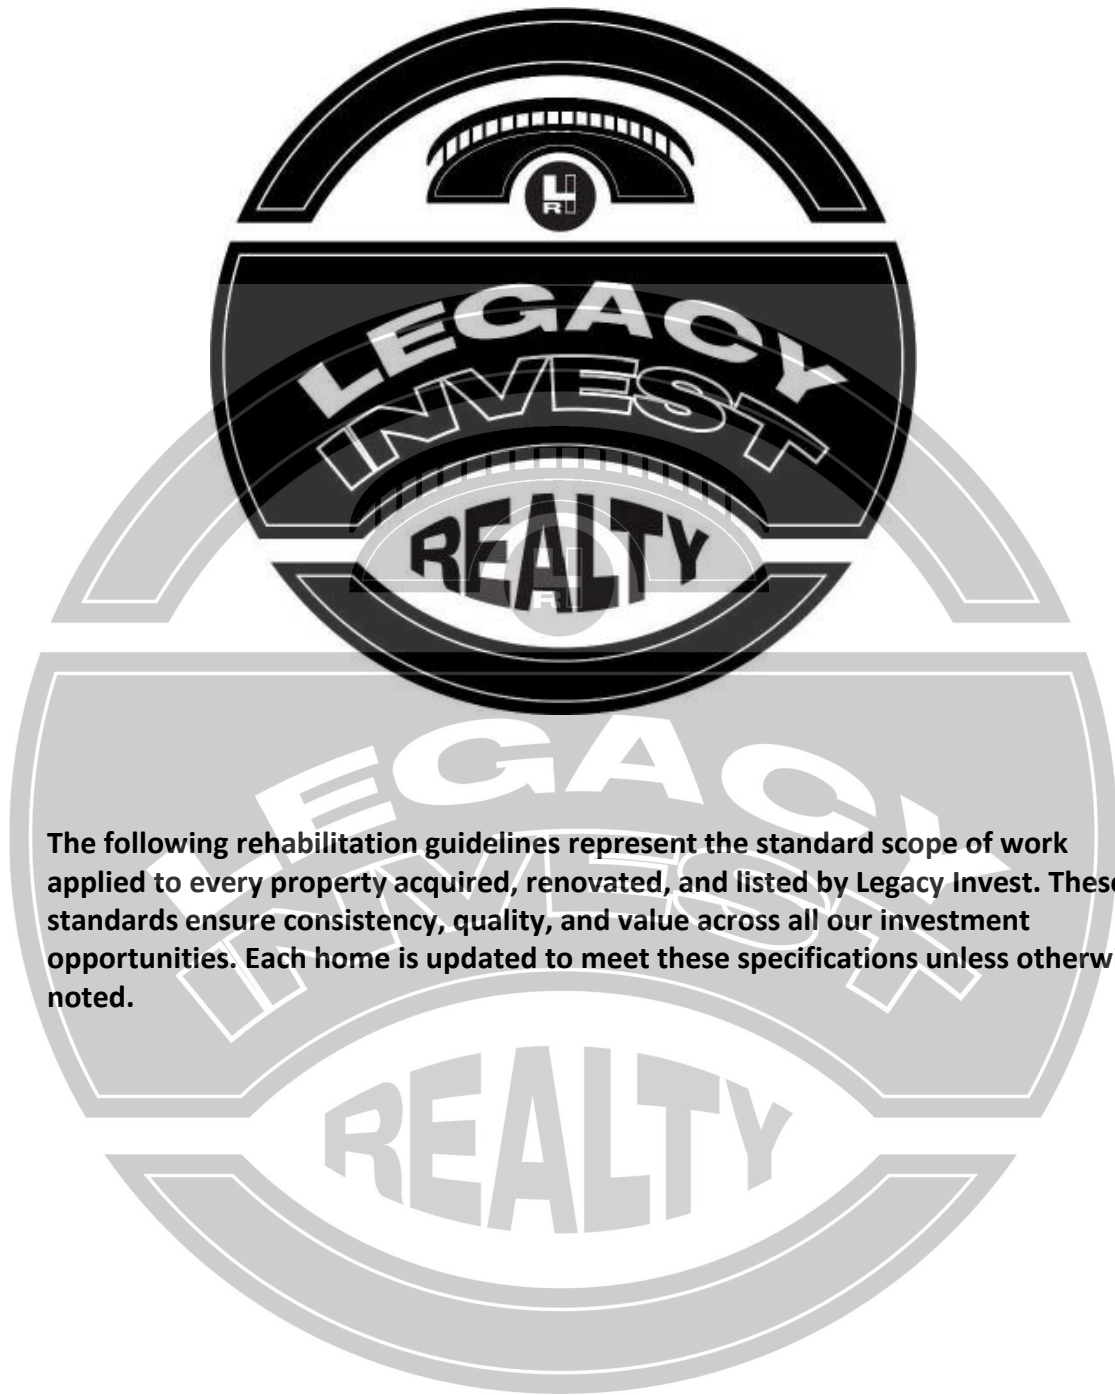

The following rehabilitation guidelines represent the standard scope of work applied to every property acquired, renovated, and listed by Legacy Invest. These standards ensure consistency, quality, and value across all our investment opportunities. Each home is updated to meet these specifications unless otherwise noted.

-----Project Scope and Standards-----


Project specific scope to be directed by LEGACY INVEST

### Roof

Option #1 = Repair existing (if directed)

Option #2 = Tear off existing roof, and install new roof including:

- Decking as needed
- Underlayment
- Architectural shingles (flat roofing when applicable)
- Flashing
- Drip edge
- Boots



### Siding and Trim

Option #1 = Repair and paint existing side as needed

Option #2 = Install new 4" vinyl siding (white (preferred) or Khaki)

- Wrap trim in white (fascia, soffit, doors, windows, posts)

Repair rotten wood as needed (door and window trim, fascia, soffit)



## Legacy Invest SOW Guide and Checklist

### Sheds / Out Buildings

Option #1 = Demolish if directed by LEGACY INVEST

Option #2 = Repair rotten wood and paint or repair existing siding


Option #3 = Install new vinyl siding and trim wrap

Install new doors as needed, with new hardware

Repair windows as needed

Ensure lights work properly

Clean out and sweep inside, leave completely bare

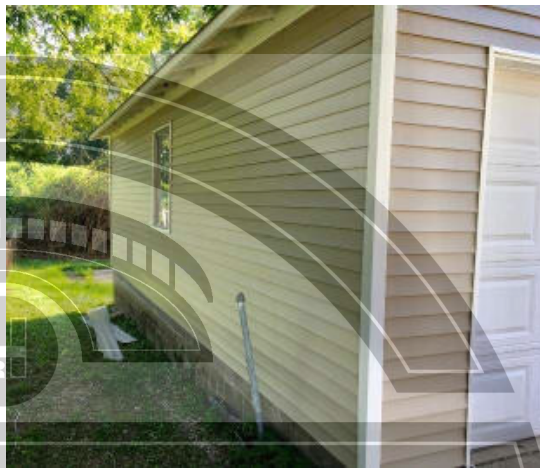

### Garages

Option #1 = Install new garage door, motor, and parts (supply one remote opener)

Option #2 = repair / service existing garage door (supply one remote opener)

Clean out and remove everything from walls and ceiling, leave bare

Perform drywall repairs and paint walls (or leave exposed stud walls)

Ensure lighting and receptacles work properly

Add self-closing hinges on exterior entry doors

Add fire block where needed



## Legacy Invest SOW Guide and Checklist



### Foundation, Porches, Steps

Paint foundation, porches, and steps in oil based Battleship Grey (Behr paint from Home Depot)



### Landscaping

Trim overgrown bushes / trees  
remove overgrown vegetation surrounding house  
Clean up-front beds, install mulch and timbers  
Trim up and shape existing bushes  
Plant small evergreen bushes  
Remove all trash and debris from yard



## Legacy Invest SOW Guide and Checklist

**Tree Trimming**

Trim limbs off roof / house to create 10' clearance

Trim / remove dead or overgrown trees at the direction of Jeff

**Concrete**

Re-pour driveway, walkways, or steps as directed by Jeff

**Masonry and Tuck Pointing**

Perform mortar and joint repair in foundation, brick, and chimneys

Repair brick as needed

**Gutters**

Repair gutters as needed

Ensure gutters have straps attached to house

Ensure gutters have elbows

Ensure gutters are secure, not loose

Clean out gutters

Add and secure gutter extensions to downspouts

**Fencing / Gates**

Option #1 = Repair existing fence / gates (wood or chain link)

Option #2 = Install new wooden fencing as directed by Jeff or required by local inspector Ensure gates open and close fully, do not drag on the ground, and latch

**General Exterior**

Install security or storm doors (at direction of Jeff) Paint exterior of doors

Paint window and door trim

Install new light fixtures

Ensure all hose bibs function properly and do not leak

Repair or replace window screens as needed

Ensure house has mailbox

Ensure house has address numbers

If present, ensure doorbell functions properly

Remove excess cable wires and boxes from house

Pressure wash house as needed

Clean and haul off all trash and debris from jobsite

## Legacy Invest SOW Guide and Checklist

### HVAC

#### Furnace and Coil

- Option #1 = service / repair existing equipment
- Option #2 = if existing equipment is inoperable or more than 10 years old, install new
- Ensure furnace is placed on blocks, not directly on ground
- Ensure condensate line is installed
- Ensure clean filter is installed
- The furnace is on a dedicated galvanized steel gas line with shut off value. No flex piping

#### Condenser

- Option #1 = service / repair existing equipment
- Option #2 = if existing equipment is inoperable or more than 10 years old, install new
- Ensure lines are properly insulated
- Install cage on condenser. Ensure cage is compatible with circular Master Lock

Ensure all duct work is installed and connected properly

Install new digital thermostat

#### Registers

- Option #1 = keep existing and paint
- Option #2 = install new registers



## Legacy Invest SOW Guide and Checklist

### Plumbing

#### Main Stack

- Option #1 = repair as needed and paint black if Galvanized steel
- Option #2 = replace with PVC
- As part of final cleaning. The main stack and Kitchen Plumbing should be Jetted and cleaned by a sewer cleaning company
- Turn in all permits to Jeff/Legacy

#### Water Heater

- Option #1 = keep / service existing unit
- Option #2 = if existing unit is inoperable or more than 10 years old, install new
- Ensure a drip pan is installed below water heater
- Install metal strapping on expansion tank for support
- Ensure proper venting for gas water heaters
- The hot water tank is on a dedicated galvanized steel gas line with shut off value. Flex piping is ok where allowed by code
- Turn in all permits to Jeff/Legacy

#### Laundry

- Ensure presence and operation of laundry supplies and drain
- Install new box and valves if laundry is on main level
- Add dryer vent to basement windows
- 




#### Kitchen

- Install new sink
- Install new faucet
- Do not install sprayer. Install cap over hole in sink.
- Install new dishwasher (dependent upon kitchen layout)
- Replace angel stops, drain lines, and supply lines as needed
- As part of final cleaning. The main stack and Kitchen Plumbing should be Jetted and cleaned by a sewer cleaning company
- Add fireblock where needed
- Check for leaks and all plumbing is tight and secure
- Turn in all permits to Jeff/Legacy

#### Bathrooms

- Install new sink faucets
- Install new toilet
- Update existing fixtures as needed to applicable color
- Replace angle stops, drain lines, and supply lines as needed. Make sure plumbing is tight and secure
- Install new tub (if directed by Jeff)
- Ensure all fixtures have ample water pressure and do not leak
- Ensure all fixtures have hot and cold water
- Ensure all sinks and tubs drain properly
- Ensure exterior hose bibs function properly and do not have broken handles
- Add fireblock where needed
- Turn in all permits to Jeff/Legacy

## Legacy Invest SOW Guide and Checklist

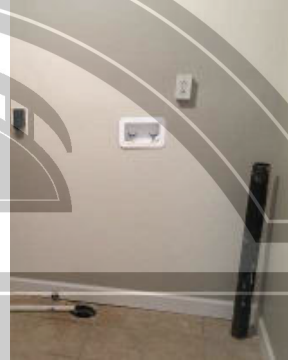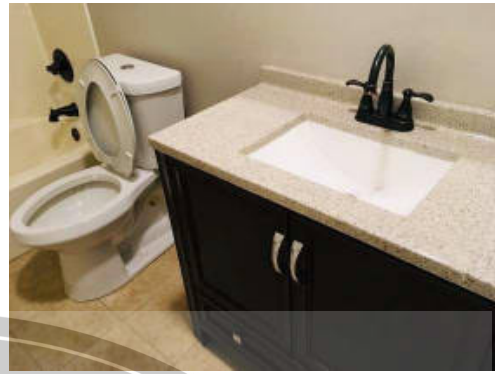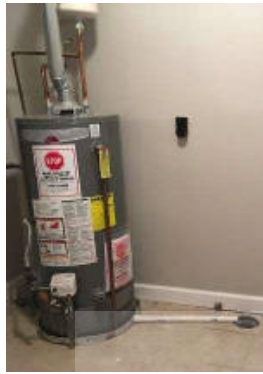

## Legacy Invest SOW Guide and Checklist

### Electric

Update / replace main panel as needed or as required by local inspectors

Replace Federal Pacific, Zinsco, and Sylvania panels (if applicable)

Ensure proper and safe wiring


Ensure all junction boxes have covers

#### Switches and Outlets

- Ensure all switches and receptacles operate properly
- Ensure house has proper receptacles for washer, dryer, and stove
- Convert all switches, receptacles, and covers to white
- GFCI installed in kitchens and bathrooms and as required by local code
- Ensure exterior outlets have proper covers
- Turn in all permits to Jeff/Legacy

### Fixtures

- Install ceiling fans in living room and bedrooms
- Install other fixtures as needed throughout the house (flush mounts, vanity light, sconces, etc)
- Install new fixtures on exterior of house
- Turn in all permits to Jeff/Legacy

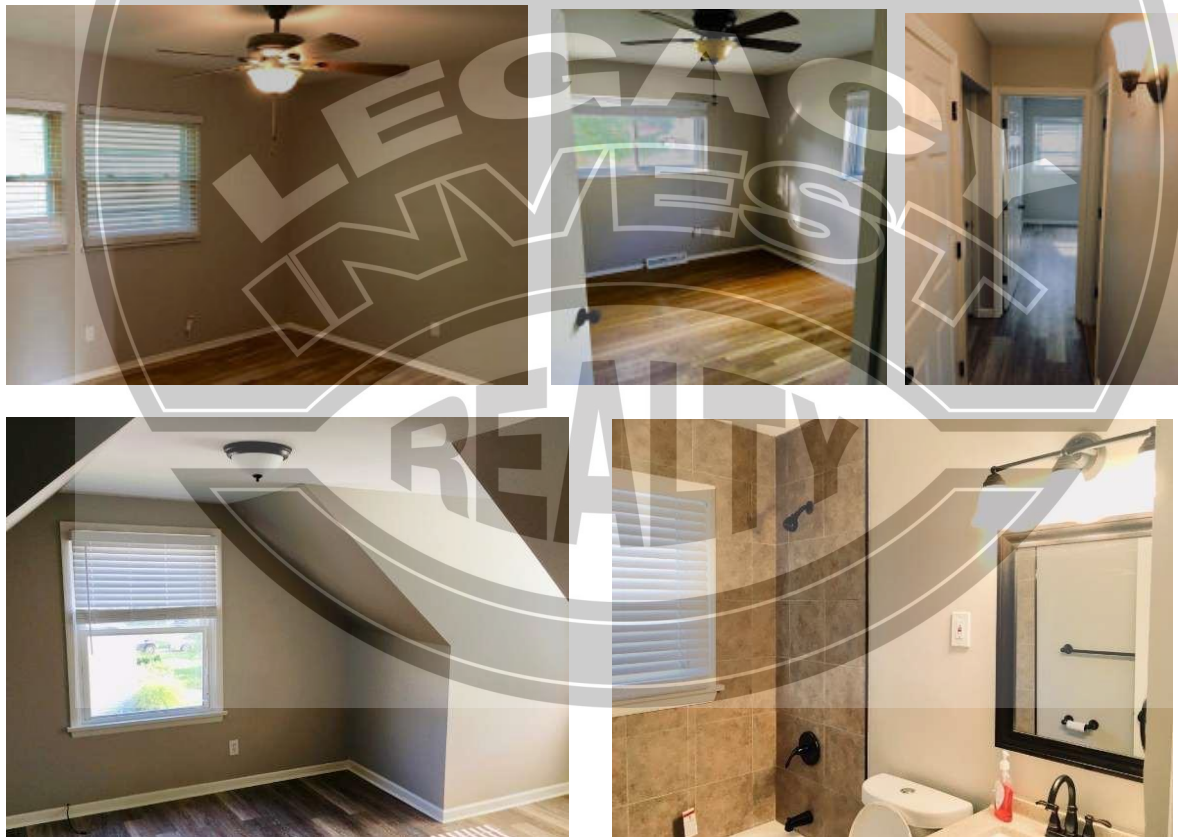

## Legacy Invest SOW Guide and Checklist

### Flooring

Make necessary repairs to subfloor as necessary


If house has existing hardwoods:

- Option #1 = clean and seal existing hardwood if in good condition with no damage
- Option #2 = Install LVP
- Option #2 = Install Tile (Add Backer board if tile is installed)

LVP kitchen, bathrooms, and laundry room (as applicable)

Haul off all carpet and junk

Install applicable transition strips between flooring if needed (not metal)

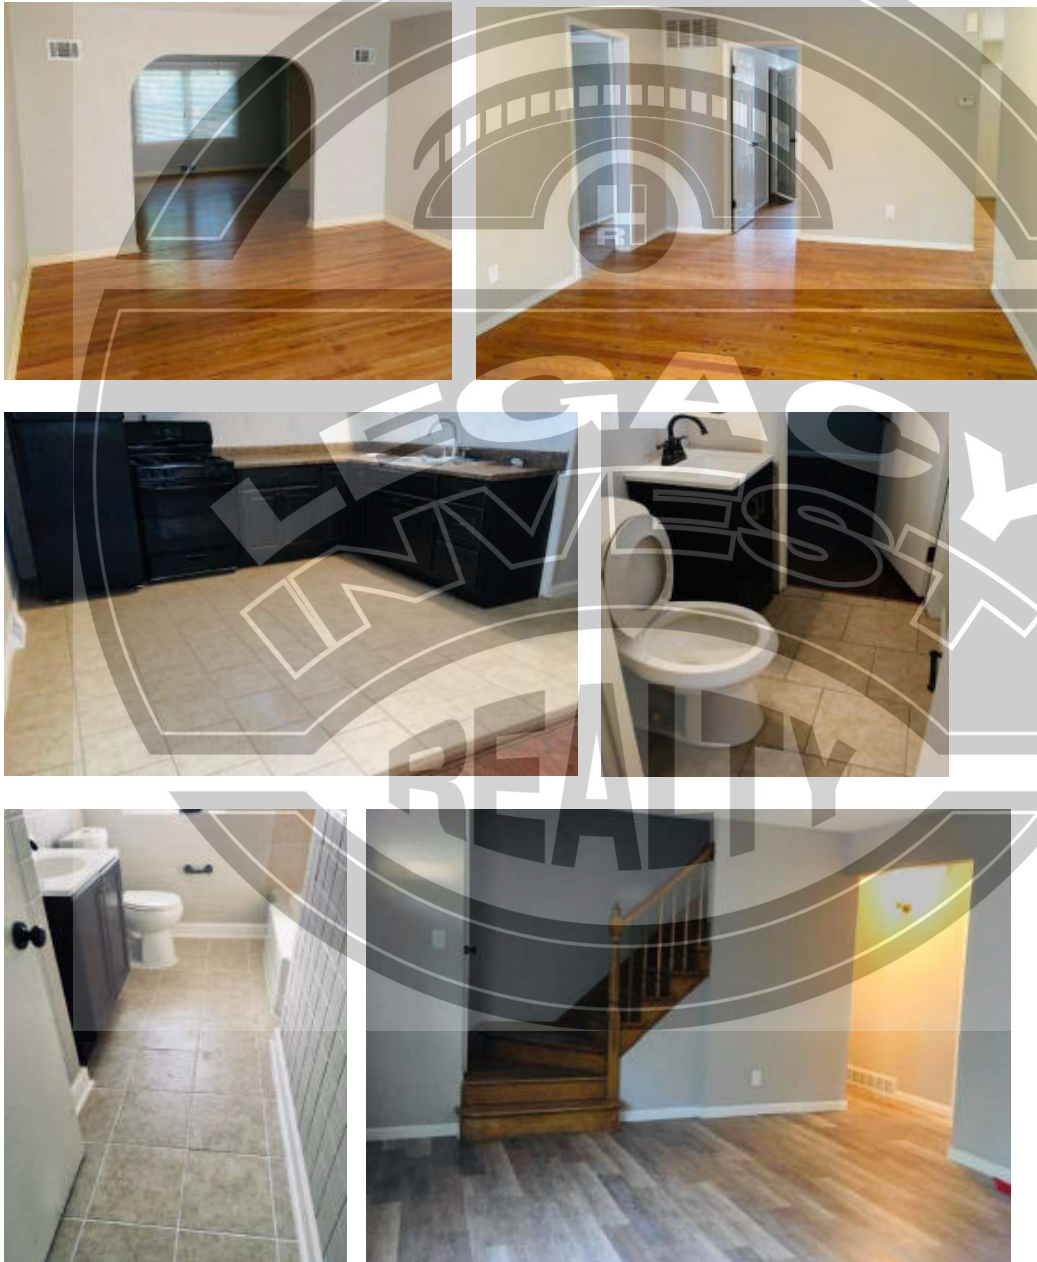

## Legacy Invest SOW Guide and Checklist

### General Interior

Install new drywall as needed and repair existing drywall

Wall prep = remove old hooks, nails, brackets, etc

Install and repair window and door trim as needed

Install and repair baseboard as needed

Paint walls, ceilings, trim, and doors

Install window blinds on every window

Install new smoke detectors. One in every bedroom and one each level of the house( must be the synced type)

Install carbon monoxide sensor on each level of the house

Check attic pull down stairs for safety and operation. Repair / replace as needed

Clean / sweep out attic

Remove and haul away all trash and debris from house

Perform a deep clean of house

Turn in all permits to Jeff/Legacy

**Deep clean house – This means all doors, windows, blinds, floors, rooms, basement, kitchen, bathrooms and garage are expected to be cleaned and ready to show to a tenant. If any required repairs are needed after the cleaning has been completed, the contractor is responsible for cleaning after repairs are made.**



## Legacy Invest SOW Guide and Checklist

### Kitchen

#### Cabinets

- Option #1 = repair existing cabinets and paint. Paint inside and outside a dark brown or black color like below
- Option #2 = install new kitchen cabinets in the same style as below

#### Countertops

- Option #1 = keep existing
- Option #2 = install new countertops

Install applicable knobs / pulls on cabinets

Install black or white venthood, dishwasher, stove, and refrigerator



## Legacy Invest SOW Guide and Checklist

**Bathrooms**

## Tub

- Option #1 = reglaze existing tub to white
- Option #2 = Install new tub

## Surround

install new surround (high quality (prefabbed) or tile)

**We will no longer be reglazing tile surrounds, Tubs are ok to reglaze**

If no window is present, install a vent fan

Install new vanity

Install flat mirror

Install bronze towel bar, towel ring, and TP holder


Remove old shower doors if applicable

Caulk / grout around tub and tile as needed

Seal around plumbing fixtures (tub spout, handles, shower head collar, etc)



## Legacy Invest SOW Guide and Checklist

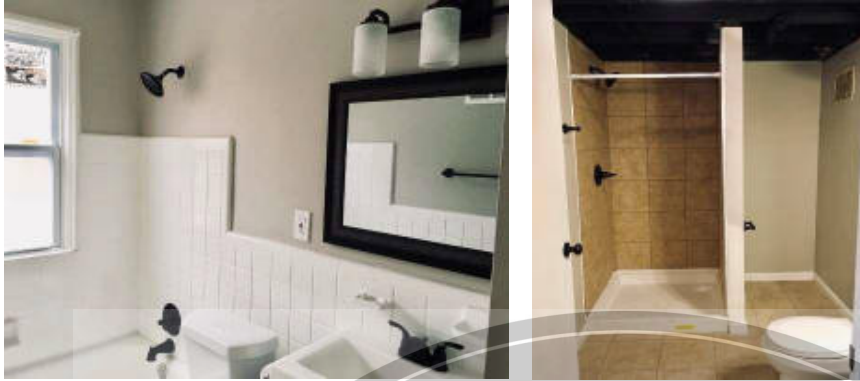**Doors**

Replace exterior and interior doors as needed

Install storm doors or security doors on exterior doors as directed by Jeff Doors separating conditioned and unconditioned space need to be solid core doors Install weather stripping on all exterior doors (sides, top, and bottom)

Covert all door hardware to bronze (knobs, locks, hinges, strike plates, stops). Includes exterior doors.

Install a door stop on every door

Ensure any trimmed doors have wood blocking installed for bottom support

Ensure doors do not drag ground or hit / rub door frame

Ensure all doors latch fully

**Windows**

Option #1 = repair existing windows as necessary

Option #2 = install new windows (white, vinyl)

Replace glass panes as needed

Every window must open, stay open, close, and lock

Replace window screens as needed

**Closets**

Remove sliding or bi-fold closet doors. Frame and install standard hinged doors

Ensure all closets have a shelf (either white wire or 1x10, 1x12, etc)

Ensure all closets have a clothes bar with proper support

Remove anything else from closet

**Basement (without addition)**

Remove all trash and debris

Clean out ceilings

Remove everything from walls (cabinets, shelving, etc)

Paint stairs Battleship Grey

Paint floor Battleship Grey

Paint walls

Install glass blocks in all windows

Ensure dryer vent duct is run to exterior

Install brackets and 2x4 across exterior doors

Ensure all lights work

## Legacy Invest SOW Guide and Checklist



## Legacy Invest SOW Guide and Checklist

### **Basement Bedroom with Addition (if directed by Jeff)**

Run electrical and HVAC as required by local code

Install egress window with well and sump pump

Frame room and closet

Finish drywall and paint walls


Install vinyl plank flooring

Spray ceiling black (throughout all of basement) or install drywall on ceiling (if required by local code)

Install flush mount light fixtures

Ensure bedroom is a minimum of 120 square feet

Turn in all permits to Jeff/Legacy

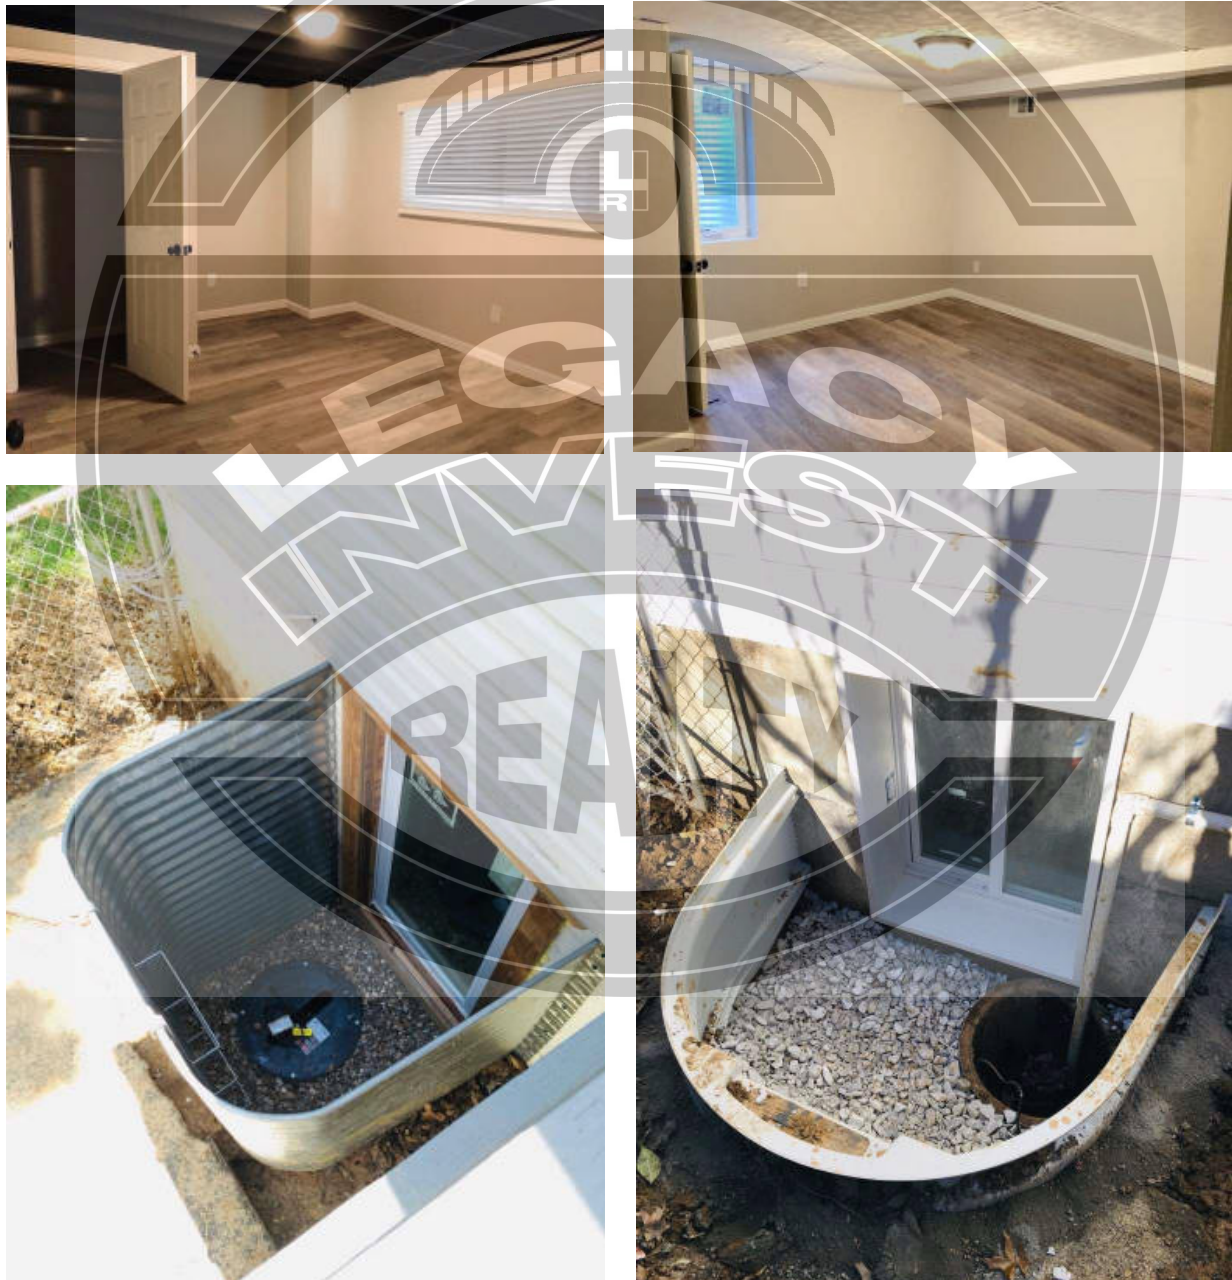

## Legacy Invest SOW Guide and Checklist

### Basement Bathroom with addition (if directed by Jeff)

Frame bathroom

Install, finish, and paint drywall

Run plumbing, electrical, and HVAC as required by local code

Tile floor

Install tub with prefabbed (preferred) or tile surround

- If space does not permit a tub, then build tiled shower with pan

Install vanity


Install toilet

Install plumbing fixtures

Install vent fan

Install towel bar, towel ring, and TP holder

Turn in all permits to Jeff/Legacy

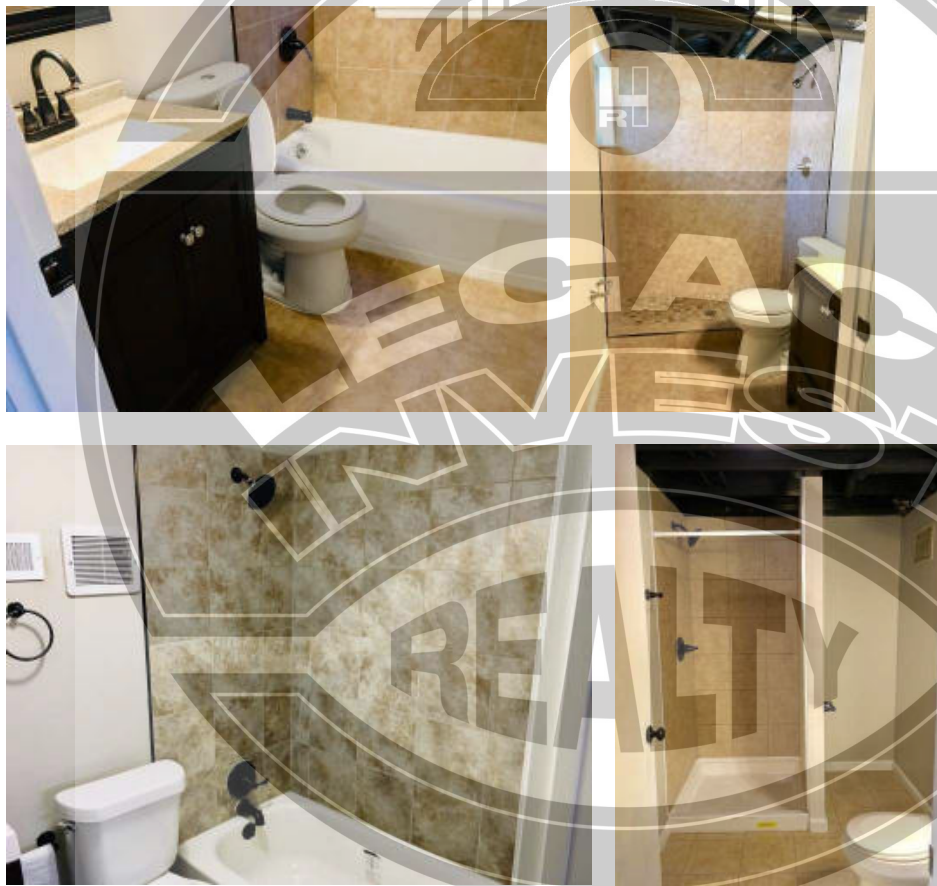

## Legacy Invest SOW Guide and Checklist



**Address -**  
**QUALITY CONTROL CHECKLIST**  
**Legacy Invest**

**Please initial next to every item that is confirmed to be in working order!**

[illegible]

## Legacy Invest SOW Guide and Checklist

|                                                                                                                                        |  |
|----------------------------------------------------------------------------------------------------------------------------------------|--|
| <b>ELECTRICAL</b>                                                                                                                      |  |
| No loose switches, receptacles, or covers                                                                                              |  |
| All light switches work                                                                                                                |  |
| All receptacles work                                                                                                                   |  |
| GFI receptacles installed in kitchen and bathrooms                                                                                     |  |
| All light fixtures have bulbs                                                                                                          |  |
| All light bulbs work                                                                                                                   |  |
| All ceiling fans and pull chains work properly                                                                                         |  |
| Ceiling fan pull chains are long enough to reach                                                                                       |  |
| All needed permits acquired and sent to Legacy Invest - <a href="mailto:Inspections@legacyinvest.net">Inspections@legacyinvest.net</a> |  |
|                                                                                                                                        |  |
| <b>PLUMBING</b>                                                                                                                        |  |
| Water heater has gas turned on and is lit                                                                                              |  |
| Drip pan installed under water heater                                                                                                  |  |
| No leaks at water heater connections                                                                                                   |  |
| Water heater expansion tank has support (metal strapping)                                                                              |  |
| No leaks at washer box valves                                                                                                          |  |
| Washer box drain is not clogged (run water through drain with a hose)                                                                  |  |
| No drips or leaks on the main plumbing stack                                                                                           |  |
| No drips or leaks under kitchen sink (drain line, supply lines, stops, etc)                                                            |  |
| No drips or leaks under bathroom sinks (drain line, supply lines, stops, etc)                                                          |  |
| No leaks at tubs (tub spouts, handles, shower heads)                                                                                   |  |
| Showers divert fully when diverter lever is pulled                                                                                     |  |
| Bathroom sink drain stoppers and levers work properly                                                                                  |  |
| Seal around shower handles, tub spouts, and collars                                                                                    |  |
| Every fixture has ample water pressure                                                                                                 |  |
| Every fixture has hot water                                                                                                            |  |
| Sinks and tubs drain properly (not clogged)                                                                                            |  |
| Toilets flush properly                                                                                                                 |  |
| Toilets are not loose or wobbly and caulked around                                                                                     |  |
| Dishwasher fills and drains properly. Run through full cycle                                                                           |  |
| Exterior hose bibs work                                                                                                                |  |
| Exterior hose bibs are secure and do not have broken handles                                                                           |  |
| All needed permits acquired and sent to Legacy Invest - <a href="mailto:Inspections@legacyinvest.net">Inspections@legacyinvest.net</a> |  |
| Fireblock added where needed                                                                                                           |  |
|                                                                                                                                        |  |
| <b>HVAC</b>                                                                                                                            |  |
| Gas is on at HVAC equipment                                                                                                            |  |
| Furnace is installed on blocking                                                                                                       |  |
| Furnace has clean filter installed                                                                                                     |  |
| Furnace has condensate line installed                                                                                                  |  |
| No damaged / disconnected duct work                                                                                                    |  |
| Every supply blows air properly                                                                                                        |  |
| Condenser has cage                                                                                                                     |  |
| Condenser lines are properly insulated                                                                                                 |  |
| All needed permits acquired and sent to Legacy Invest - <a href="mailto:Inspections@legacyinvest.net">Inspections@legacyinvest.net</a> |  |
|                                                                                                                                        |  |
|                                                                                                                                        |  |
|                                                                                                                                        |  |
|                                                                                                                                        |  |
|                                                                                                                                        |  |

## Legacy Invest SOW Guide and Checklist

|                                                                                                                                        |  |
|----------------------------------------------------------------------------------------------------------------------------------------|--|
| <b>BASEMENT</b>                                                                                                                        |  |
| Glass blocks in every window                                                                                                           |  |
| Floor is clean and painted                                                                                                             |  |
| Lights / bulbs all work                                                                                                                |  |
| Brackets and 2x4 installed on exterior doors                                                                                           |  |
| All needed permits acquired and sent to Legacy Invest - <a href="mailto:Inspections@legacyinvest.net">Inspections@legacyinvest.net</a> |  |
| Dyer vent added for dryer                                                                                                              |  |
| Fireblock added where needed                                                                                                           |  |
|                                                                                                                                        |  |
| <b>CLEANING AND MISC.</b>                                                                                                              |  |
| Clean paint from switches, receptacles, and covers                                                                                     |  |
| Clean paint from doorknobs                                                                                                             |  |
| Attic cleaned out and swept                                                                                                            |  |
| Clean up house - trash, construction debris, paint on floors, etc                                                                      |  |
| Gallon of wall paint and gallon of trim paint left at house                                                                            |  |
| Property is ready to be shown                                                                                                          |  |
| Drain cleaning for kitchen and main stack has been preformed                                                                           |  |
|                                                                                                                                        |  |
| <b>EXTERIOR</b>                                                                                                                        |  |
| Clean yard - trash, glass, construction debris, etc                                                                                    |  |
| Clean and sweep out garage                                                                                                             |  |
| Clean and sweep out storage room / shed                                                                                                |  |
| Garage doors and motors open and close properly                                                                                        |  |
| Gutters are secure and have elbows                                                                                                     |  |
| Gutters are cleaned out                                                                                                                |  |
| Trim vegetation and growth away from house                                                                                             |  |
| All light fixtures have bulbs and work properly                                                                                        |  |
| Ensure gates open and close fully and do not drag on the ground                                                                        |  |
| Ensure gates latch                                                                                                                     |  |
| Handrails and deck railings are tight / secure and painted same color                                                                  |  |
| Doorbell works (if applicable)                                                                                                         |  |
| House has address numbers                                                                                                              |  |
| House has mailbox                                                                                                                      |  |
|                                                                                                                                        |  |