



REAL ESTATE • INSURANCE • MANAGEMENT

BUYER DOCUMENT

Preliminary Scope of Work

This document describes, in plain language, exactly what Legacy Invest intends to do to this house before it is turned over to you — trade by trade and room by room. It is issued early, before the work begins, so that you are buying a documented plan rather than a promise.

WHAT'S INSIDE

-
- 01 Whole-house scope overview
 - 02 How the work gets done — eight stages
 - 03 Specification by trade — sections A through I
 - 04 Room-by-room scope
 - 05 Verification and warranty
-


This scope is preliminary. It is written from the initial condition assessment and is subject to change once demolition exposes concealed conditions and licensed trades complete their evaluations. Any material change to the scope will be issued to you as a revision to this document before the work is performed.

OVERVIEW • WHOLE-HOUSE CUTAWAY

What We Touch on the House

Ten systems are addressed on every full rehabilitation. The cutaway below shows where each one sits in the building. The detailed specification for each system begins on the following pages.

FIGURE 1 — SCOPE ZONES, TYPICAL SINGLE-FAMILY REHABILITATION

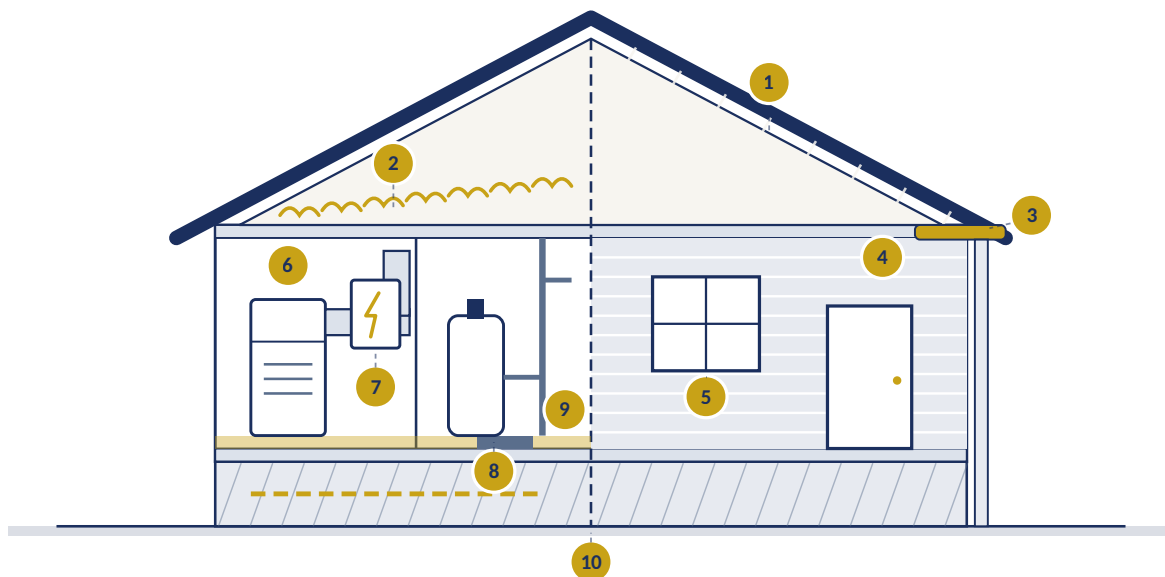

1 Roof system

Tear-off to decking, replace rotten sheathing, new architectural shingles, felt, drip edge and boots.

3 Gutters, fascia & soffit

Rotten wood replaced, seamless gutters and downspouts discharged away from foundation.

5 Windows & exterior doors

Broken glass and failed sashes replaced, new locksets, weatherstripping and thresholds.

7 Electrical

Panel and service inspected, deficiencies corrected, devices and fixtures replaced throughout.

9 Interior finishes

Drywall repair, full interior paint, new flooring, trim, interior doors and hardware.

2 Attic & insulation

Insulation replaced or upgraded where needed, ventilation verified, attic access sealed.

4 Siding & exterior paint

Damaged siding replaced, surfaces prepped and painted with the full exterior color package.

6 HVAC

System evaluated or replaced, ductwork sealed, new thermostat, condenser pad and cage.

8 Plumbing & water heater

Supply and drain lines tested under pressure, leaks corrected, water heater serviced or replaced.

10 Foundation & grading

Structural items addressed, crawlspace cleared and vapor barrier set, grading pulled off the slab.

PROCESS • EIGHT STAGES

How the Work Gets Done

The rehabilitation is executed in a fixed sequence by our in-house construction division. Every stage produces a record — a photo set, a permit, an inspection result or a signed checklist — and those records are what back the warranties on the final page.

01 Condition assessment

The property is walked and photographed in full. Every deficiency is documented with a dated photo before a dollar is spent.

02 Scope written and priced

This document is produced — a line-item scope by trade, priced from our own construction division rather than a third-party bid.

03 Permits pulled

Permits are acquired in every jurisdiction that requires them. We do not perform permit-required work without one.

04 Before photos

A complete before set is captured and filed so the finished condition can be verified against the starting condition.

05 Rehab executed

Trades are sequenced: demo and trashout, roof and exterior dry-in, mechanical rough-in, drywall, paint, flooring, cabinets and fixtures, punch list.

06 Trade inspections

Plumbing, electrical, HVAC and building inspections are scheduled and passed where the jurisdiction requires them.

07 Quality control walkthrough

An internal QC checklist is walked and signed off by construction management before the job is called complete.

08 Documentation and handoff

After photos are filed, warranties are activated and the property is turned over rent-ready to property management.

What you receive at closing — the final scope of work with every line marked complete, the before-and-during-and-after photo set, the signed quality control checklist, and the written warranties described on the last page of this document.

SECTION A • ROOFING AND ATTIC

Specification by Trade



Roofing & Attic


SECTION A

The roof is settled first, because everything downstream depends on the house being dry. A roof either gets replaced outright or gets inspected, repaired and certified with documented remaining life. We do not hand over a property with an unresolved roof.

ITEM & LEGACY INVEST STANDARD SPECIFICATION

- Roof covering** — Tear off to decking, replace bad sheathing, synthetic underlayment, architectural shingles.
- Flashing & boots** — New pipe boots, valley and step flashing, drip edge at all eaves and rakes.
- Repair alternative** — Roofs with documented remaining life are repaired and certified in writing, not replaced.
- Attic insulation** — Insulation replaced or upgraded where needed.
- Ventilation** — Ridge, static or turbine venting installed if needed and balanced against soffit intake.
- Attic access** — Hatch or pull-down insulated and weatherstripped.

FIGURE 2 — ROOF ASSEMBLY — WHAT A TEAR-OFF TO DECKING REBUILDS

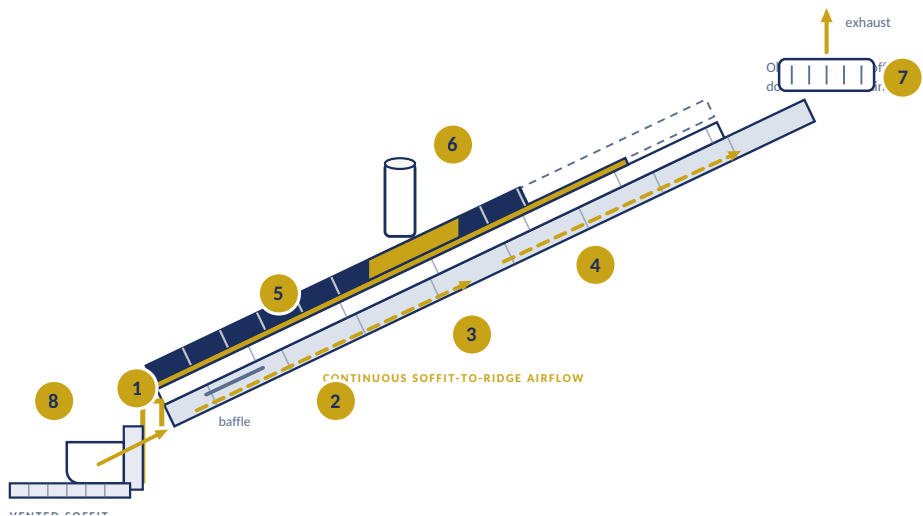

- | | | |
|----------------------------------|--------------------------|-----------------------------------|
| 1 Drip edge & seamless gutter | 2 Rafters / trusses | 3 Decking, rotten sheets replaced |
| 4 Synthetic underlayment | 5 Architectural shingles | 6 New pipe boot & flashing |
| 7 Ridge vent installed if needed | 8 Vented soffit intake | |

SECTION B • EXTERIOR ENVELOPE

Specification by Trade



Exterior Envelope


SECTION B

Siding, trim, glazing and gutters are treated as one system. The objective is a sealed, painted, water-shedding exterior that will not generate a maintenance call in your first two years of ownership.

ITEM & LEGACY INVEST STANDARD SPECIFICATION

- Siding & trim** — Rotted siding, fascia, soffit, corner boards and window trim replaced in kind.
- Exterior paint** — Wash, scrape, spot prime bare wood, then full finish coat on body, trim and doors.
- Gutters** — Seamless gutters and downspouts with extensions discharging four feet off the foundation.
- Windows** — Broken glass and failed sashes corrected; every window opens, closes, locks and has a screen.
- Exterior doors** — Front door replaced or refinished; new deadbolt and knob keyed alike; weatherstrip and threshold.
- Porch, steps & rails** — Structural repair as needed; handrail installed where required by code.

FIGURE 3 — EXTERIOR ENVELOPE — HOW THE HOUSE SHEDS WATER

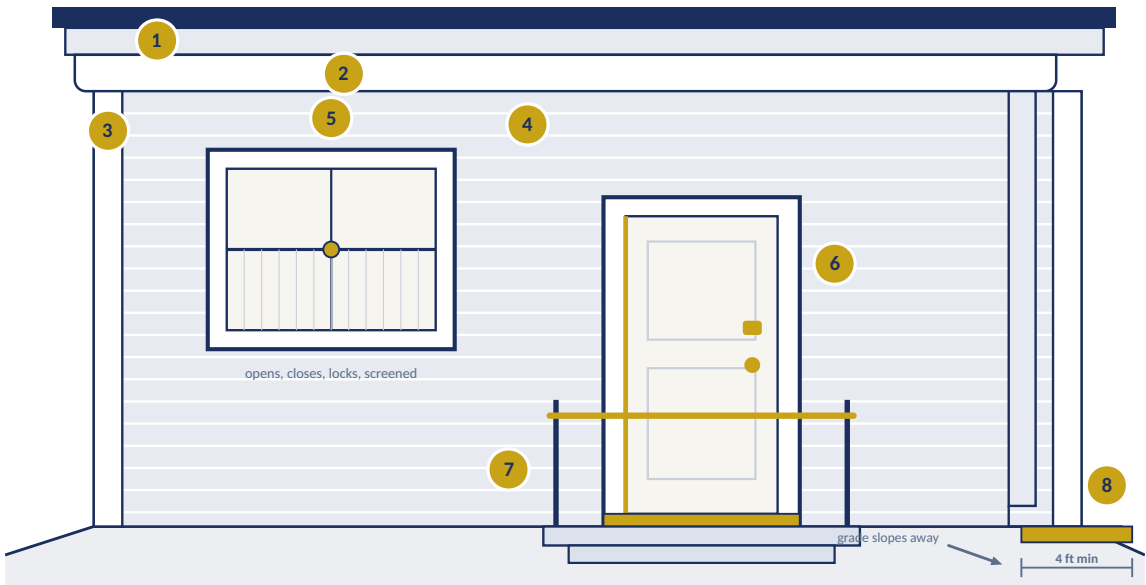

- | | | |
|-------------------------------------|-----------------------|---|
| 1 Fascia & soffit | 2 Seamless gutter | 3 Corner boards & trim |
| 4 Siding replaced, prepped, painted | 5 Windows | 6 Door, deadbolt, weatherstrip, threshold |
| 7 Porch, steps & handrail | 8 Downspout extension | |

Specification by Trade



Heating & Air Conditioning


SECTION C

HVAC is evaluated by a licensed technician, not by eye. Systems past economical repair are replaced with a new matched system rather than patched, and that replacement is what the mechanical warranty attaches to.

ITEM & LEGACY INVEST STANDARD SPECIFICATION

System	— Evaluated by a licensed contractor; replaced with a new matched system if beyond economical repair.
Ductwork	— Inspected and sealed, damaged runs replaced, supply and return in every conditioned room.
Thermostat	— New programmable thermostat installed and tested.
Condenser	— New level pad and locking condenser cage installed as a theft deterrent.
Commissioning	— Refrigerant charge verified and temperature split documented at startup.
Vent cleaning	— Full duct and vent cleaning performed before turnover.

FIGURE 4 — HVAC — SYSTEM, DISTRIBUTION AND CONDENSER

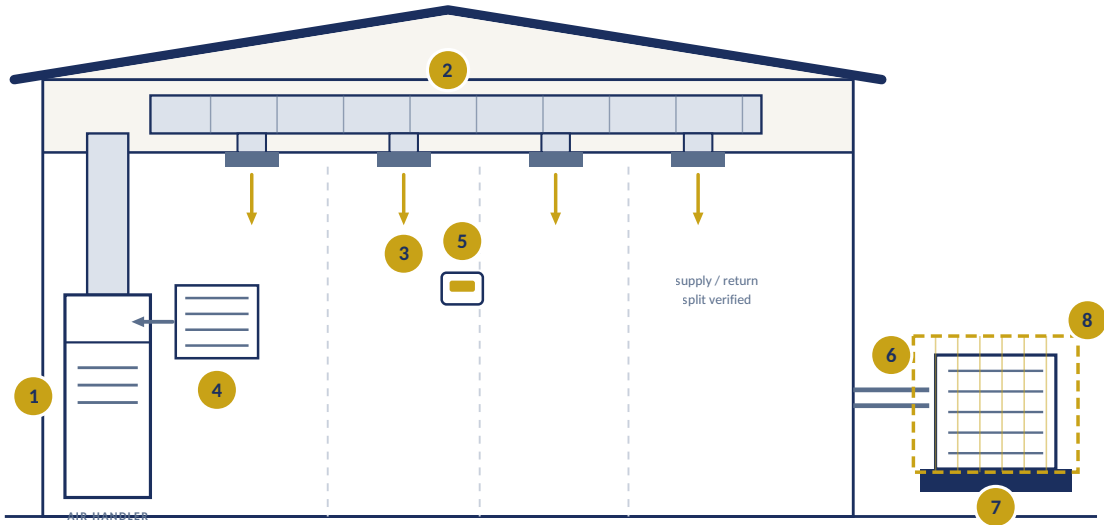

- | | | |
|--------------------------------|-------------------------------|------------------------------------|
| 1 System evaluated or replaced | 2 Trunk & branch duct sealed | 3 Supply in every conditioned room |
| 4 Return air | 5 New programmable thermostat | 6 Line set |
| 7 New level pad | 8 Locking condenser cage | |

SECTION D • PLUMBING

Specification by Trade




Plumbing

SECTION D

Supply and drain systems are tested under pressure and flow rather than assumed. Anything that leaks, drains slowly or is made of an obsolete material is corrected before the walls close.

ITEM & LEGACY INVEST STANDARD SPECIFICATION
Supply lines — System pressure tested; leaking, corroded or galvanized sections replaced.
Drain, waste & vent — Flow tested and cleared; main line scoped where age or condition warrants.
Water heater — Serviced or replaced; new T&P valve and discharge line; pan and drain where required.
Fixtures — New faucets, supply lines, angle stops, toilets and wax rings throughout.
Exterior — Hose bibs replaced; main shutoff located, tagged and confirmed operable.
Documentation — Twist-drain service completed and logged in the pre-closing file.

FIGURE 5 — PLUMBING — SUPPLY, DRAIN, WASTE AND VENT

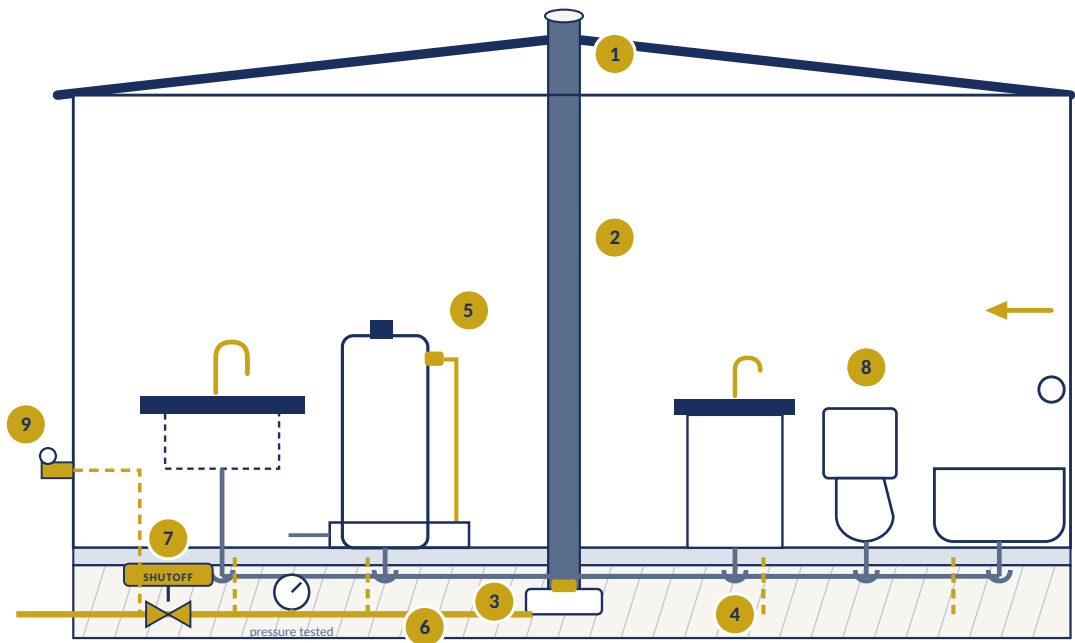

- | | | |
|---------------------------------|----------------------------------|--------------------------|
| 1 Vent through roof | 2 Main drain / waste stack | 3 Cleanout |
| 4 Traps & branch drains | 5 Water heater, T&P, pan & drain | 6 Supply pressure tested |
| 7 Main shutoff located & tagged | 8 New fixtures, stops & supplies | 9 Hose bib |

SECTION E • ELECTRICAL

Specification by Trade



Electrical

SECTION E

Electrical work is performed and inspected by licensed trades. The panel, the grounding and the life-safety devices are the three areas we never leave to a handyman.

ITEM & LEGACY INVEST STANDARD SPECIFICATION

Service & panel — Inspected by a licensed electrician; obsolete, recalled or undersized panels replaced.

Grounding & bonding — Brought to current standard, including water and gas bonding where applicable.


Devices — Outlets and switches replaced; GFCI at kitchen, baths, laundry, garage and exterior.

Fixtures — New interior light fixtures throughout and exterior lighting at every entry.

Life safety — Smoke detectors in each bedroom and hallway; CO detector where gas appliances are present.

Inspection — Permit pulled and final inspection passed where the jurisdiction requires it.

FIGURE 6 — ELECTRICAL — SERVICE, GROUNDING AND DEVICE COVERAGE

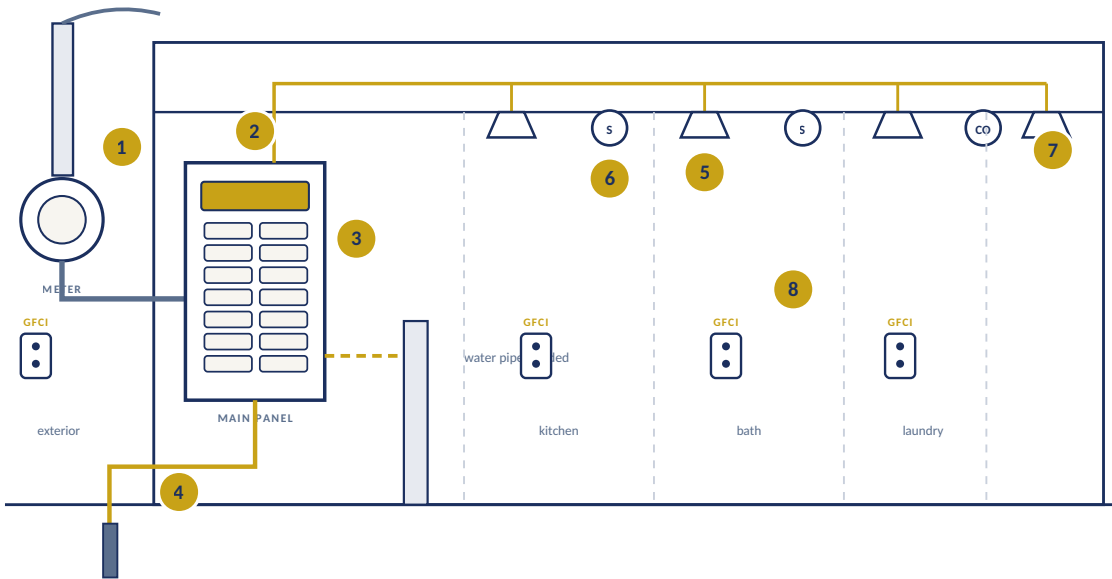

- | | | |
|------------------------------------|--|----------------------------|
| 1 Service entrance & meter | 2 Panel inspected or replaced | 3 Breakers correctly sized |
| 4 Grounding & bonding | 5 New light fixtures | 6 Smoke detectors |
| 7 CO detector where gas is present | 8 GFCI at kitchen, bath, laundry, exterior | |

SECTION F • INTERIOR FINISHES

Specification by Trade



Interior Finishes


SECTION F

The finish package is standardized across the portfolio so that turns are fast and inexpensive: the same paint, the same flooring, the same hardware. A repair three years from now is a phone call, not a color-match exercise.

ITEM & LEGACY INVEST STANDARD SPECIFICATION

- Drywall** — Holes, cracks and water-damaged board cut out and replaced; texture matched.
- Interior paint** — Full two-tone interior — walls, ceilings and trim — in the standard program colors.
- Flooring** — Luxury vinyl plank in living areas, kitchen, baths and laundry; carpet in bedrooms if specified.
- Trim & doors** — Baseboard repaired or replaced; interior doors, casing and hardware as needed.
- Window covering** — Two-inch faux wood blinds installed on every window.
- Closets** — Shelving and rods reset and secured in every closet.

FIGURE 7 — TYPICAL ROOM — INTERIOR FINISH PACKAGE

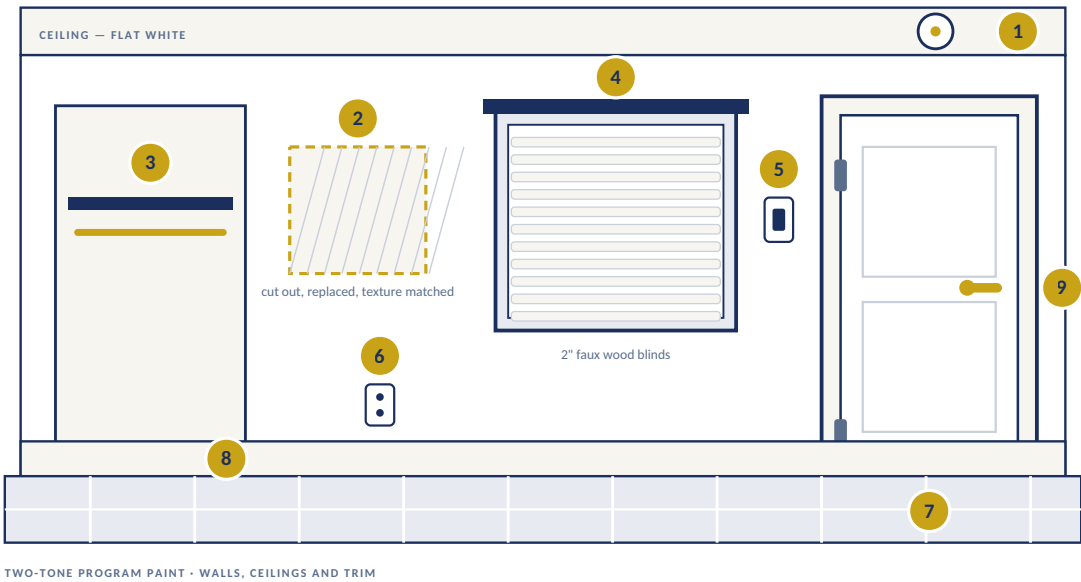

- | | | |
|------------------------------------|-------------------------------------|------------------------------------|
| 1 Smoke detector | 2 Drywall cut out & texture matched | 3 Closet shelving reset |
| 4 Windows with 2" faux wood blinds | 5 Switches replaced | 6 Outlets replaced |
| 7 LVP flooring | 8 Baseboard repaired or replaced | 9 Interior door, casing & hardware |

SECTION G • KITCHEN

Specification by Trade

Kitchen

SECTION G

The kitchen is the single largest driver of how quickly the property leases and what it leases for, so it gets a full finish rather than a touch-up.

ITEM & LEGACY INVEST STANDARD SPECIFICATION

Cabinets — Refinished or replaced; every door and drawer aligned, functional and fitted with new hardware.

Countertops — Replaced as needed; new backsplash sealed at all wall and sink joints.


Sink & faucet — New sink, faucet, strainer and disposal where present, with new supply lines and stops.

Appliances — Range and range hood per program; refrigerator and dishwasher where specified.

Electrical — GFCI counter receptacles and dedicated appliance circuits verified.

Finish — Flooring run continuous, toe kick finished, cabinets cleaned inside and out.

FIGURE 8 — KITCHEN ELEVATION — STANDARD FINISH PACKAGE

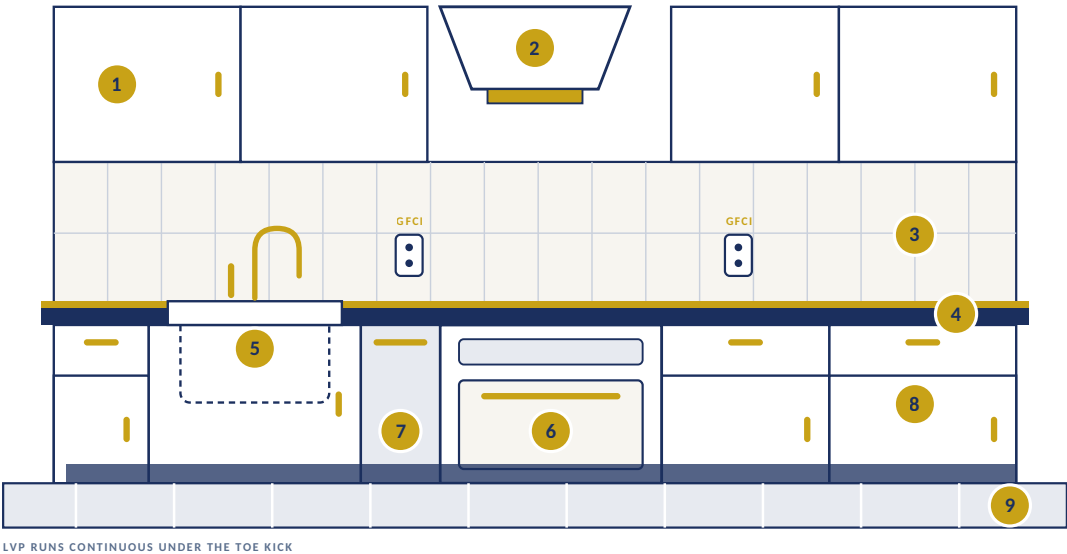


- | | | |
|----------------------------------|--------------------------------------|------------------------------------|
| 1 Upper cabinets, new hardware | 2 Range hood | 3 New backsplash, sealed at joints |
| 4 Countertops replaced as needed | 5 New sink, faucet, disposal | 6 Range |
| 7 Dishwasher | 8 Base cabinets aligned & functional | 9 LVP flooring |

SECTION H • BATHROOMS

Specification by Trade

Bathrooms SECTION H
Bathrooms are rebuilt to be watertight first and attractive second. Every wet joint is sealed before the finishes go in.
ITEM & LEGACY INVEST STANDARD SPECIFICATION
Tub & shower — Surround repaired or replaced, valve serviced, all joints caulked watertight.
Vanity — New vanity, top, faucet and mirror with new supply lines and angle stops.
Toilet — New toilet, seat, supply line and shutoff, set on a new wax ring.
Finish — Moisture-resistant paint, new towel bar and paper holder, GFCI receptacle.
Flooring — Luxury vinyl plank with sealed perimeter at tub, toilet and vanity.

FIGURE 9 — BATHROOM — WATERTIGHT ASSEMBLY

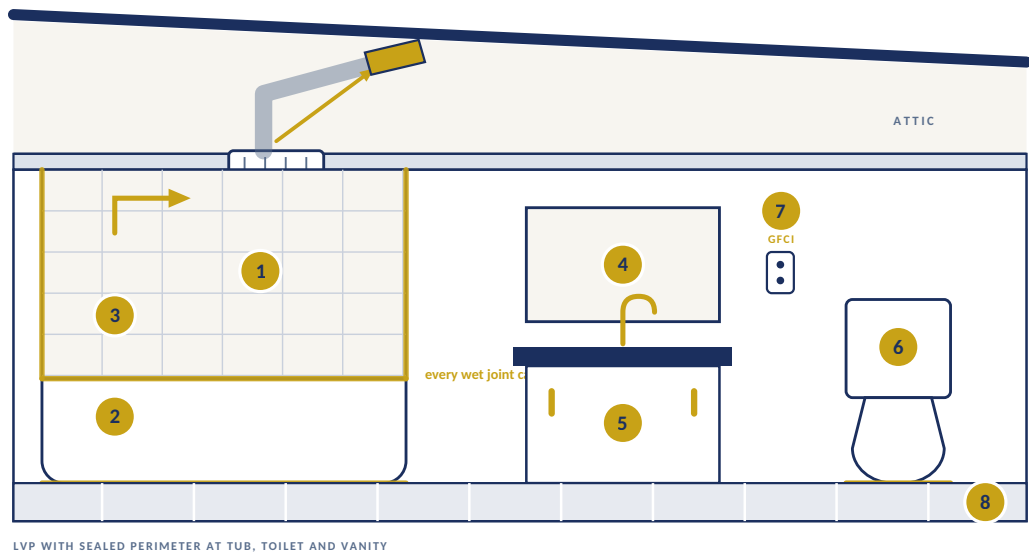


- | | | |
|---------------------------------|----------------------------|--------------------------------|
| 1 Surround repaired or replaced | 2 Tub | 3 Valve serviced |
| 4 New mirror | 5 New vanity, top & faucet | 6 New toilet on a new wax ring |
| 7 GFCI receptacle | 8 LVP flooring | |

FLOOR PLAN • CALLOUTS 1-10

Room by Room

The trade sections describe the systems. The plan below describes where the work lands inside the house.

FIGURE 10 — ROOM-BY-ROOM SCOPE CALLOUTS

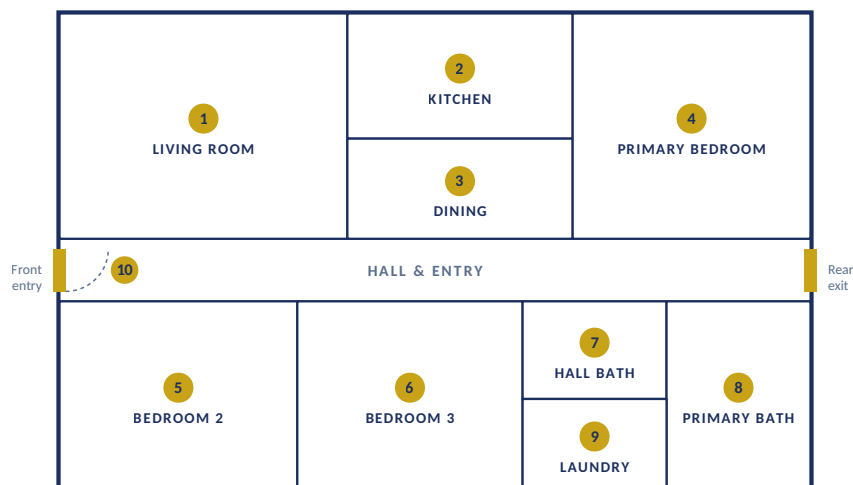

ROOM	SCOPE
1 Living Room	Drywall repair, full paint, LVP flooring, new fixture and blinds, outlets and switches replaced, HVAC supply and return verified.
2 Kitchen	Cabinets refinished or replaced, new counters and backsplash, sink, faucet and disposal, appliances per program, GFCI counter circuits, LVP flooring.
3 Dining	Drywall repair, full paint, LVP flooring, new light fixture, blinds, devices replaced.
4 Primary Bedroom	Paint, flooring per program, closet shelving reset, ceiling fan or fixture, smoke detector, blinds.
5 Bedroom 2	Paint, flooring per program, closet shelving reset, new fixture, smoke detector, blinds.
6 Bedroom 3	Paint, flooring per program, closet shelving reset, new fixture, smoke detector, blinds.
7 Hall Bath	Tub surround repaired or replaced, new vanity and top, toilet, GFCI, LVP flooring, moisture-resistant paint.
8 Primary Bath	Shower or tub sealed watertight, new vanity, top and mirror, toilet, GFCI, LVP flooring.
9 Laundry	Water heater serviced or replaced, washer box and shutoffs checked, dryer vent cleaned, GFCI, LVP flooring.
10 Hall & Entry	Paint, flooring, smoke detector, new entry door hardware, thermostat location, attic access sealed and insulated.

Turnover, Verification & Warranty

	Site, Safety & Turnover	SECTION I
The last two weeks are about handing over a property that is clean, secure and photographable — the condition a tenant actually walks into on move-in day.		
ITEM & LEGACY INVEST STANDARD SPECIFICATION		
Trashout — All interior and exterior debris, abandoned property and construction waste removed.		
Landscaping — Overgrowth cut back, limbs cleared off the roof and service lines, beds cleaned and edged.		
Grading & drainage — Soil pulled back from the foundation and negative grading corrected.		
Fencing & gates — Repaired and made operable where present.		
Rekey & secure — All exterior doors rekeyed at completion and a lockbox set for management.		
Final clean — Full detail clean including vents, appliances, glass and fixtures, ready for photos.		

Nothing in this scope is sold on our word alone. Each of the three commitments below is tied to a document that travels with the property at closing.



Permitted & Inspected

Permits are pulled and final inspections passed in every jurisdiction that requires them.



1-Year Mechanical Warranty

Twelve months from the date of closing on the systems that matter — heating and cooling, plumbing, electrical and water heater — covering parts and labor on the work performed under this scope.



90-Day SOW Warranty

Ninety days from the date of closing on the completed rehabilitation itself. If a line item in this document was not performed to specification, we return and correct it at our cost.

What the warranty does not cover

- Tenant-caused damage, misuse, neglect or lack of routine maintenance after turnover.
- Normal cosmetic wear, settlement cracking, and consumable items such as filters, bulbs and batteries.
- Any line item marked N/A or deferred by written agreement, and any component outside the scope described in this document.
- Damage from storms, flooding, freeze events or other causes properly covered by property insurance.
- Work performed by parties other than Legacy Invest or its subcontractors after the date of closing.

Legacy Invest • Preliminary Scope of Work. This document is a description of intended work and is not an invoice, a bid to a third party, or a guarantee of investment performance. Pricing, if attached, is presented separately.